

PRODUCT DATA SHEET

3050-SLR for Super Low Range Moisture Analysis

Quartz-crystal microbalance (QCM) technology: accurate, reliable, verifiable and responsive

The 3050-SLR provides an extremely accurate measurement of trace levels of moisture in a gas through the use of a quartz-crystal oscillator sample cell. This analyzer brings the benefits of quartz-crystal technology to a broad spectrum of low-range moisture measurement applications.

Direct measurement of concentration


The 3050-SLR measures moisture concentration directly in parts per million by volume (ppmv), parts per million by weight (ppmw), or mass of water per standard volume without additional pressure or temperature compensation. For customers who wish to convert concentration to dew/frost point, the 3050-SLR can be programmed for a live process pressure input or a fixed process pressure.

Accurate and responsive

The accuracy of the 3050-SLR is ± 0.03 ppmv or $\pm 10\%$ of reading, whichever is greater, over the calibrated range of 0.1 to 100 ppmv. The design of the 3050-SLR enables a speed of response that is far superior to other analyzers, while consuming as little as 150 standard cubic centimeters per minute (sccm) of sample gas. The reliability and stability of the QCM sensor eliminates the need for routine factory recalibration requirements.

On-line verification ability

The 3050-SLR is equipped with the ability to self-verify its accuracy and sensitivity to moisture. This can be done on a programmed schedule, or whenever necessary. With a built-in zero module and internal moisture generator, the 3050-SLR provides data you will have confidence in. If necessary, the analyzer can make small corrections to its calibration automatically. If a severe calibration problem exists, the analyzer will provide an alarm.

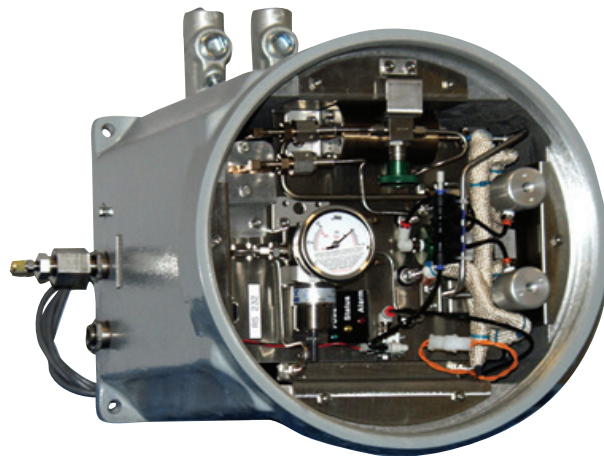

KEY BENEFITS

- Most accurate trace moisture measurement technology available
- Fast response to changing moisture levels
- Specific to moisture in most applications
- Rugged sensor

APPLICATIONS

- The 3050-SLR is specifically designed to monitor trace moisture levels

KEY MARKETS

- Petrochemical
- Natural gas
- Refinery
- Chemical

PERFORMANCE SPECIFICATIONS

| | |
|-------------------------------------|---|
| Technology | QCM |
| Range | 0.1 to 100 ppmv. Readout capability in ppmw, lb/mmscf, mg/Nm ³ , and dew point temperature in °C or °F (requires process pressure as an input) |
| Reference gas | Continuously produced using actual sample gas |
| Online verifications | Internal moisture source with NIST-traceable calibration enables on-demand verification of analyzer accuracy and responsiveness without uninstalling the analyzer. Verification function can be triggered remotely with a voltage signal |
| Accuracy | ±0.03 ppmv or ±10% of reading from 0.1 to 100 ppmv, whichever is greater |
| Reproducibility | ±0.015 ppm or ±5.0% of reading, whichever is greater |
| Limits of detection | 0.1 ppmv |
| Moisture generator | 1.0 ppmv nominal, calibration is NIST traceable |
| Reliability | No routine factory calibration required due to highly stable and reliable nature of QCM sensor |
| QCM response time | Near real time. Computer-enhanced response, which may lead to errors, is not required to obtain quick wet-up or dry-down response |
| Sensitivity | 0.01 ppmv or 1% of reading, whichever is greater |
| Allowable inlet pressure | 1.38 to 3.45 Bar (20 to 50 psi) gauge (up to 200 Bar (3000 psi)) with optional pressure reducer; analyzer performance is independent of process pressure |
| Exhaust pressure | 0 to 1 Bar (0 to 15 psi) |
| Sample gas temperature | 0 to 100°C (32 to 212°F); analyzer performance is immune to changes in sample gas temperature |
| Gas flow temperature | Approx. 150 sccm. Approx. 1.0 L/min bypass flow for increased speed of response |
| Alarms | Two contact closures: system and data valid alarms |
| Outputs | Isolated 4-20 mA analog signal, keyboard selectable; 12-bit (0.025%) resolution, RS-232 and RS-485 serial communication ports (supports Modbus RTU) |
| Ambient temperature limits | -20 to 50°C (-4 to 122°F) |
| Utility requirements | 120/240 VAC, 50/60 Hz, 150 Watts Instrument Air: 70 to 100 psi (5 to 7 Bar) |
| Approvals and certifications | UL/CSA General Safety Requirements UL/CSA Class I, Division 1, Groups B, C, D T6 Electromagnetic compatibility directive; EN61326-1 Industrial low voltage directive; EN61010-1 pressure equipment directive ATEX Directive: II 2 G Ex de IIC T6 (or T5) Gb IP65 The T6 rating applies to ambient temperatures below 40°C (104°F) Russian Gosstandart Pattern Approval Russian Ex Proof Certification: 1ExdIICT6X |
| Enclosure | IP65 |

SALES, SERVICE & MANUFACTURING

USA - Pennsylvania

150 Freeport Road
Pittsburgh PA 15238
Tel: +1 412 828 9040
Fax: +1 412 826 0399

USA - Delaware

455 Corporate Blvd.
Newark DE 19702
Tel: +1 302 456 4400
Fax: +1 302 456 4444

Canada - Alberta

2876 Sunridge Way NE
Calgary AB T1Y 7H9
Tel: +1 403 235 8400
Fax: +1 403 248 3550

WORLDWIDE SALES AND SERVICE LOCATIONS

USA

Tel: +1 713 466 4900
Fax: +1 713 849 1924

Brazil

Tel: +55 19 2107 4100

France

Tel: +33 1 30 68 89 20
Fax: +33 1 30 68 89 99

Germany

Tel: +49 2159 9136 0
Fax: +49 2159 9136 39

India

Tel: +91 80 6782 3200
Fax: +91 80 6780 3232

Singapore

Tel: +65 6484 2388
Fax: +65 6481 6588

China

Beijing
Tel: +86 10 8526 2111
Fax: +86 10 8526 2141
Chengdu
Tel: +86 28 8675 8111
Fax: +86 28 8675 8141
Shanghai
Tel: +86 21 5868 5111
Fax: +86 21 5866 0969



© 2018, by AMETEK, Inc. All rights reserved. Printed in the U.S.A. F-0126 Rev 10 (0918)
One of a family of innovative process analyzer solutions from AMETEK Process Instruments. Specifications subject to change without notice.

